

# Cell Power Supplies




- Universal Input (85-264V)
- Designed to Meet EN60950
- Complies with EN55022-B, FCC-B
- Input Filter and PFC Included
- Operating Temp. = 0°C to 60°C
- Easy Maintenance
- Remote ON/OFF
- Adjustable Output Voltage
- Maximum 600 Watts

Part #	Max. Input Current (A)		Max. Inrush Current (A)	Efficiency Typ. (%)	Leakage Current (mA)	Cooling Method	Remote ON/OFF Control
	115V	240V					
MRS600	10	5	35	78	0.95	FAN	YES

## Modular Output (Cell) Units

Part #	Output Ratings		Output Ripple (mV)	Line Regulation (%)	Load Regulation (%)	Total Regulation (%)	Remote Sensing	Output Failure Detection	Remote ON/OFF Control
	VDC	Amps (Max)							
MFS120-3	3.0 - 3.6	24	100	±1	±2	±5	YES	YES	YES
MFS120-5	4.5 - 5.5	24	100	±1	±2	±5	YES	YES	YES
MVS120-12	5.0 - 15.0	10	240	±1	±2	±5	YES	YES	YES
MVS120-24	18.0 - 30.0	5	480	±1	±2	±5	YES	YES	YES
MVD50-12D	5.0 - 15.0	4.2	240	±1	±2	±5	NO	NO	NO
	5.0 - 15.0	4.2	240	±1	±2	±5	NO	NO	NO
MVD50-122	5.0 - 15.0	4.2	240	±1	±2	±5	NO	NO	NO
	18.0 - 30.0	2.1	480	±1	±2	±5	NO	NO	NO
MVD50-24D	18.0 - 30.0	2.1	480	±1	±2	±5	NO	NO	NO
	18.0 - 30.0	2.1	480	±1	±2	±5	NO	NO	NO

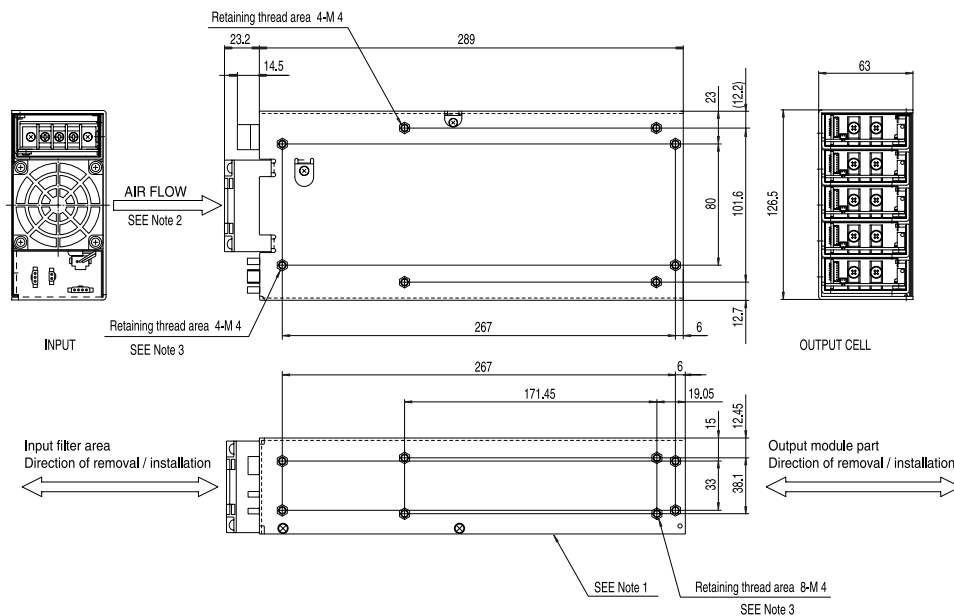

## TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com

USA

Tel: 800-872-6624  
Fax: 909-676-9482

Japan

Tel: 81 (0)3 3978-2111  
Fax: 81 (0)3 3923-0230

United Kingdom

Tel: 44 (0) 1380 731 700  
Fax: 44 (0) 1380 731 702

Hong Kong

Tel: 852-2389-4321  
Fax: 852-2341-9689